

NEW

2X FASTER

ENGINEERED FOR QUIET FLOORS

PASLODE SUBFLOOR NAIL SCREW INSTALLS 2× FASTER
THAN TRADITIONAL SCREW FIXING



Optimised holding power designed to minimise sheet movement



Reduce the risk of floor squeaks and costly call-backs




Exclusively designed for use with Paslode FrameMaster NightWolf

FIND
OUT
MORE



paslode.co.nz

Paslode

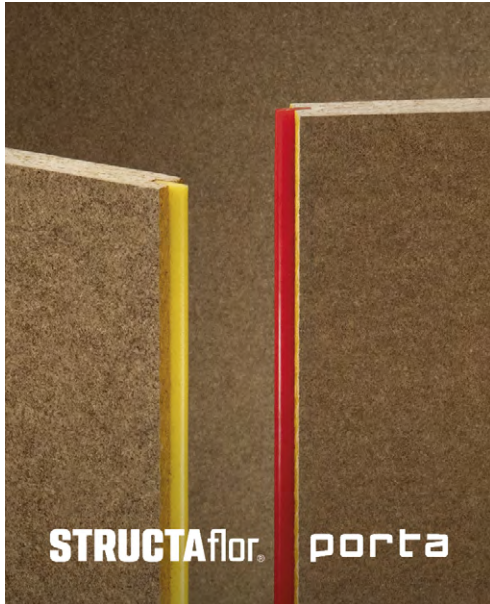

Joist Material: Softwood. **Thickness:** 19mm & 22mm.

STRUCTAflor YELLOWtongue & REDtongue

TOOLS



**Paslode
FrameMaster
NightWolf
NW580**



**Paslode
FrameMaster
-Li
B20580**

NAIL SOLUTIONS



**Paslode NightWolf
65 x 3.0mm
Nail Screw
ElectroGalvanised
NW007**



**Paslode
65 x 2.87mm
DekfastRing
Shank HDG
B20558**



Thickness: 19mm & 22mm.

Hardie™ Secura™ Flooring

TOOLS



**Paslode
FrameMaster
NightWolf
NW580**



**Paslode
FrameMaster
-Li
B20580**

NAIL SOLUTIONS



**Paslode NightWolf
50 x 2.87mm
DekfastRing
Shank HDG
NW557**




**Paslode
65 x 2.87mm
DekfastRing
Shank HDG
B20558**



**Paslode
50 x 2.87mm
DekfastRing
Shank HDG
B20557**

© 2026 James Hardie Australia Pty Ltd. ABN 12 084 635 558.™ and ® denote a trademark or registered trademark owned by James Hardie Technology Ltd.

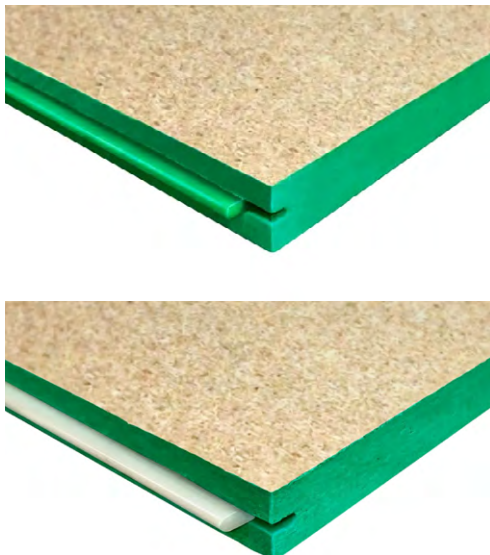

Thickness: 19mm & 22mm.

LAMINEX® EnduraFloor GREEN & BEIGE TONGUE

TOOLS



**Paslode
FrameMaster
NightWolf
NW580**



**Paslode
FrameMaster
-Li
B20580**

NAIL SOLUTIONS



**Paslode NightWolf
65 x 3.0mm
Nail Screw
ElectroGalvanised
NW007**



**Paslode
65 x 2.87mm
DekfastRing
Shank HDG
B20558**

© 2026 Laminex Group Pty Limited. ABN 98 004 093 092.™ and ® denote a trademark or registered trademark owned by Laminex Group Pty Limited.