

JDN Nail Pack Range

All Fasteners come in boxes of 3,000

Part N°	Length x Diameter	ShankType/Finish
B20463	50 x 2.87mm	Smooth / Bright
B20528D	50 x 2.87mm	Smooth / Gal
B20464	60 x 2.87mm	Smooth / Bright
B20465	65 x 2.87mm	Smooth / Bright
B20531	65 x 2.87mm	Ring / Bright
B20529	65 x 2.87mm	Smooth / Gal
B20467	75 x 3.06mm	Smooth / Bright
B20466D (**)	75 x 3.06mm	Smooth / Bright
B20539	75 x 3.06mm	Ring / Bright
B20468 (*)	75 x 3.06mm	Smooth / Bright
B20529D	75 x 3.06mm	Smooth / Gal
B20468A	82 x 3.15mm	Smooth / Bright
B20469	90 x 3.15mm	Smooth / Bright
B20529F	90 x 3.15mm	Smooth / Gal

* Shear Point

** Short Strip

DekFast JDN Packs

Part N°	Length x Diameter	ShankType/Finish
B20443	50 x 2.87mm	Ring / Mech Gal
B204444	65 x 2.87mm	Ring / Mech Gal

Comes with sturdy nylon bag



Contact | Paslode Australia

Head Office

47 - 55 Williamson Road
Ingleburn
NSW 2565
Australia

Note:


Tests undertaken by the University of Technology, Sydney, have confirmed that the Paslode 75x3.06mm gun driven nail and the Duo-Fast 75x3.06mm gun driven nail comply with the performance requirements of AS1684.2 & 3 -1999 "Residential Timber-Framed Construction" Clause 9.5 and satisfy the Standard's requirements for "Nominal Fixings."

Your nearest distributor:

 Paslode
Australia

A Division of ITW Australia Pty Ltd
ABN 63 004 235 063

Paslode®

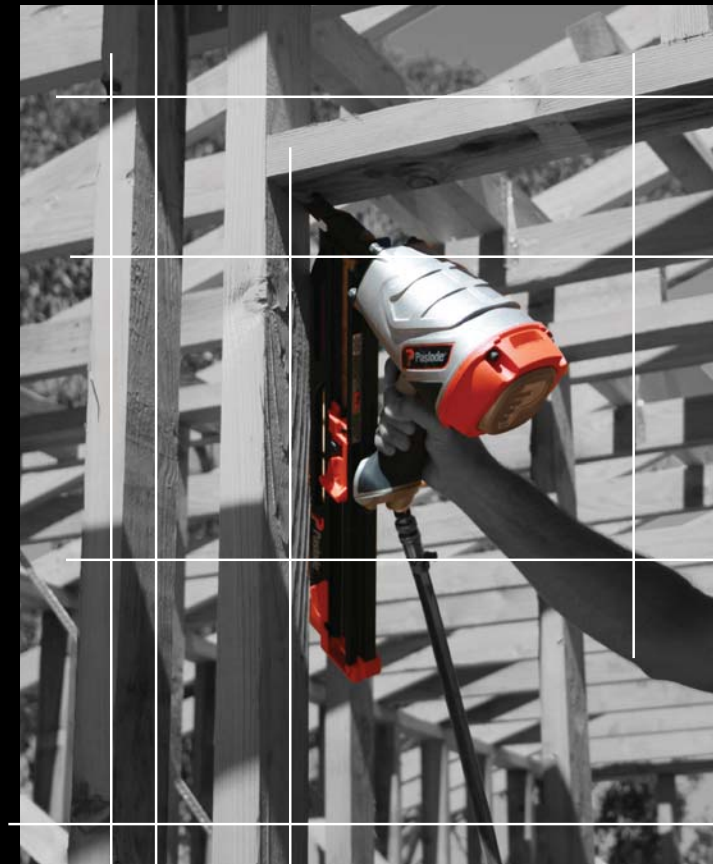

PowerMaster PF350S

Paslode PowerMaster PF 350-S

Brand new tool design incorporating the latest features. Power & reliability is the reputation a PowerMaster is known for and the PF 350-S keeps the tradition alive. Heavy duty alloy body survives 8ft drop tests from any angle but is still comfortable to use due to improved balance. Tool free depth dial adjustment for precise fastener placement. Interchangeable trigger position so you can choose from bump or sequential firing.

Product Specification

Product code	B20430
Weight	3.4kg
Length	457mm
Height	330mm
Operating pressure	80 - 120psi
Air consumption	2.7L @ 90psi
Magazine capacity	92 nails (approx.)

Fastener Specifications

Fastener type	D Head strip
Collation medium	Plastic laminate
Shank diameters	2.87 to 3.30mm
Shank lengths	50 - 90mm
Magazine collation	34 Degree

Applications

- Framing
- Flooring
- Roofing
- Trusses
- Joists
- Wall panels

Paslode PowerMaster PF 350-S



Features & Benefits

- 1 **Rear load magazine**
For fast loading
- 2 **Extruded aluminium magazine**
Offers durability with light weight
- 3 **Simple nose design**
Provides easy line of sight
- 4 **Aluminium housing**
Developed to withstand 8ft drop tests from any angle
- 5 **Large selectable trigger**
Comfortable to use even when wearing gloves, choose sequential or 'bump'
- 6 **Comfort slip resistant grip**
Provides great comfort in all types of weather
- 7 **Aggressive Work Contact Element**
Grabs hold of the timber to prevent slipping
- 8 **Dial Adjustable depth**
Provides precise control of nail depth
- 9 **Lockout feature**
Preventing blank firing

Accessories



Rafter Hook Kit
Part No. B20432



No Mar
Part No. 502234